

Top-up Cards

On this page

- [Top-up Cards List](#)
- [Creating New Series](#)
- [Mass Top-up Cards Edit](#)

Top-up Cards List

This section allows generating series of top-up cards for your customers. These cards can be used to recharge the balance. The main window of this section is displayed on screenshot:

Screenshot: Top-Up Cards section main window

Status	Serial Number	Amount	PIN Code	Reseller	Activated	Created on
●	4-005561615	50.00 USD	3984 5829 5664	ASIA	—	03/09/2016 09:41:39 +0000
●	4-005561617	50.00 USD	3160 2374 4968	ASIA	—	03/09/2016 09:41:39 +0000
●	4-005561616	50.00 USD	8986 6153 4979	ASIA	—	03/09/2016 09:41:39 +0000
●	4-005561614	50.00 USD	8301 1781 1736	ASIA	—	03/09/2016 09:41:39 +0000
●	3-002715022	100.00 USD	6490 1310 3406	Company Name	—	03/09/2016 09:40:52 +0000
●	3-002715023	100.00 USD	6031 0976 9143	Company Name	—	03/09/2016 09:40:52 +0000
●	1-004811012	5.00 USD	5016 2986 1306	AC	—	01/08/2016 11:29:42 +0000

Creating New Series

To create new series, click the «Generate Top-Up Cards» button.

Screenshot: New Top-up Cards window

Top-up Cards

Amount: USD

Quantity:

Series:

PIN Length: digits

Reseller:

Expiry Date:

Field Name	Description
Amount	Cards balance value within series. This amount will be added to the customer's balance on activation.
Quantity	Number of cards within series

Series	A code identifier of card series. This code will prepend a serial number. For example, if the series is "101", the full card number will be "101-23423423".
PIN Length	Specify the desired PIN-code length for current calling card series (it can not be less than 8 digits)
Reseller	Defines the reseller that owns current calling card series
Expiry date	Current calling cards series will be expired on specified date

After top-up card series is created, your customers will be able to enter respective PINs in their control panel in *Payment Gateways* section, to recharge their balance (respective rights for users are required).


The status of top-up cards is displayed in *Top-Up Cards* main window in a form of the following icons:

Icon	Description
	Shows, that the current card is new
	Shows, that the current card is activated
	Shows, that the current card is expired

Mass Top-up Cards Edit

Also, you may delete cards or change some settings for already created top-up cards using **"Mass Edit" button**. In the following window you can specify expiration date of cards by changing state of respective *"Expiry Date"* field to *"set to"* and select data and time, and define a reseller who will be the owner of these cards by changing state of *"Company"* field to *"set to"* and select a reseller from drop-down list, then click the *"Process"* button and all changes will be applied. The *"Delete all"* button will wipe out all existing top-up cards.

Screenshot: *Top-up cards "Mass Edit" window*

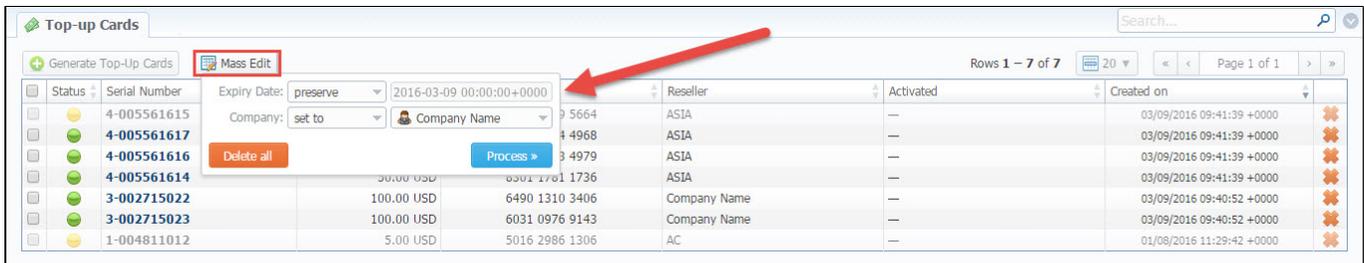

Mass edit options	Description
Optional parameters	<ul style="list-style-type: none"> preserve - the default configuration that saves the rate not edited. Leave this parameter unchanged if required; set to - it allows to edit rates, for example, specify the same expiry date for all rates at once, regardless of previous configurations.
Expiry Date	Final date after which the rate will expire
Company	Name of one of your companies (or affiliates) that you can add in Reseller section